


**6 Fiber Single Mode Multitube Fiber Optic  
Cable Part No. 1-2225406-4**



**DATA SHEET**

**CABLE DESCRIPTION**

- 1 9/125 micron Single-mode Armored Optical Fiber cables
- 2 Designed with a Loose tube construction
- 3 Tubes are gel filled to ensure protection against moisture ingress
- 4 Designed for use in the following applications like Backbone cabling, Campus site cabling & Outdoor Ducts or Direct Burial applications
- 5 Cable contains upto 6 Fibers
- 6 Each loose tube contain 6 Optical Fibers
- 7 ECCS Armour
- 8 Central Strength - FRP Rod
- 9 HDPE Sheath

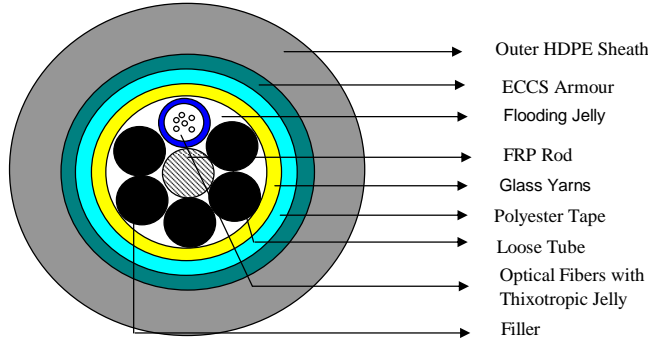

SL.No.	PARAMETER	UNIT	SPECIFICATIONS
1	TYPE OF CABLE		6F MULTITUBE ARMORED OPTICAL FIBER CABLE
2	STANDARDS		
a)	EN 50173; ISO/IEC 11801		YES
b)	ANSI/TIA-568-C.3		YES
c)	Telcordia GR-409		YES
3	FIBER		SINGLE MODE FIBER
a)	FIBER SIZE	um	9/125/250 (OS2)
b)	No. OF FIBERS / LOOSE TUBE	No.	6F
c)	FIBER IDENTIFICATION		
	6F		Blue, Orange, Green, Brown, Grey & White
4	OPTICAL PARAMETERS - SM		
a)	ATTENUATION @ 1310nm	dB/Km	≤ 0.34 (MAX)
b)	ATTENUATION @ 1550nm	dB/Km	≤ 0.22 (MAX)
c)	ATTENUATION @ 1380 - 1386nm	dB/Km	≤ 0.31 (MAX)
d)	POINT DISCONTINUITY	dB	≤ 0.1
e)	CUT-OFF WAVELENGTH	nm	≤ 1260
f)	CHROMATIC DISPERSION @ 1310 nm	ps/nm x km	≤ 3.5
g)	CHROMATIC DISPERSION @ 1550 nm	ps/nm x km	≤ 18
h)	CORE/MODE-FIELD	um	9
i)	CLADDING	um	125
j)	COATING	um	250
5	LOOSE TUBE / TIGHT BUFFER		LOOSE TUBE
a)	MATERIAL		PBTP
b)	No. OF LOOSE TUBES	No.	1
c)	DIAMETER	mm	3±0.2
d)	COLOUR OF LOOSE TUBE		BLUE
e)	SEQUENCE OF ELEMENTS IN CORE		BL LOOSE TUBE, BK1, BK2, BK3, BK4 & BK5 FILLERS
f)	LOOSE TUBE GEL		WATER BLOCKING GEL
g)	CORE WRAPPING		SINGLE LAYER OF POLYESTER TAPE
6	JACKETING		
a)	MATERIAL		HDPE
b)	COLOUR		BLACK
c)	NOMINAL THICKNESS	mm	2.0
d)	OVERALL DIAMETER (NOMINAL)	mm	15.5
7	STRENGTH MEMBERS		YES
a)	TYPE ( Peripheral )		WATER BLOCKING E-GLASS
b)	TYPE ( Central )		FRP ROD
8	ARMOURING		
a)	TYPE		ECCS TAPE
b)	MS TAPE THICKNESS		> 0.15
9	MECHANICAL PROPERTIES		
a)	MINIMUM INSTALLATION BEND RADIUS	mm	310
b)	MINIMUM SERVICE BEND RADIUS	mm	248
c)	CABLE WEIGHT (NOMINAL)	Kg/Km	215
d)	STANDARD LENGTH	Mtrs	2KM±5%
e)	TENSILE STRENGTH	N	4000
f)	MAXIMUM CRUSH RESISTANCE	N	4000
g)	OPERATING TEMPERATURE	deg C	-20 to +70
h)	TYPE OF PACKING		WOODEN DRUM
10	PRINTING DETAILS		ADC F.O CABLE 1-2225406-4 ECCS GEL LOOSE TUBE 6X9/125 SMF HDPE (ML)XXXX/YY/ZZ MMMM

This document is Confidential, and is the property of ADC India Ltd. ADC India owns the copyright, and the document must not be copied or changed in any form, wholly or in part, without prior permission from ADC India. The contents of this document must not be disclosed to any other person or persons